



97x97x33mm

- **Airflow:** 37.6~58.4CFM
- **Static Pressure:** 46.4~139.6mm-H₂O
- **Blade / Housing:** Plastic Material UL 94V-0 P.B.T.
- **Lead Wire:** UL1007 #24 AWG
- **Weight:** 200.0 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
BD129733LB-N	2B	12	7~13.2	4500	37.6	46.4	1300	15.60	80000	5	54.8
BD129733MB-N	2B		7~13.2	4850	39.8	55.9	1650	19.80	80000	4	56.7
BD129733HB-N	2B		7~13.2	5250	43.9	68.5	2000	24.00	75000	3	58.4
BD129733EB-N	2B		7~13.2	5750	48.2	86.6	2700	32.40	65000	2	60.6
BD129733UB-N	2B		7~13.2	6850	58.4	139.6	4200	50.40	65000	1	64.8
BD249733LB-N	2B	24	12~26.4	4500	37.6	46.4	770	18.48	80000	5	54.8
BD249733MB-N	2B		12~26.4	4850	39.8	55.9	900	21.60	80000	4	56.7
BD249733HB-N	2B		12~26.4	5250	43.9	68.5	1000	24.00	75000	3	58.4
BD249733EB-N	2B		12~26.4	5750	48.2	86.6	1200	28.80	65000	2	60.6
BD249733UB-N	2B		12~26.4	6850	58.4	139.6	2000	48.00	65000	1	64.8

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S


Function Available

N A I F R Q S T M V C P D W U

PERFORMANCE P-Q CURVE

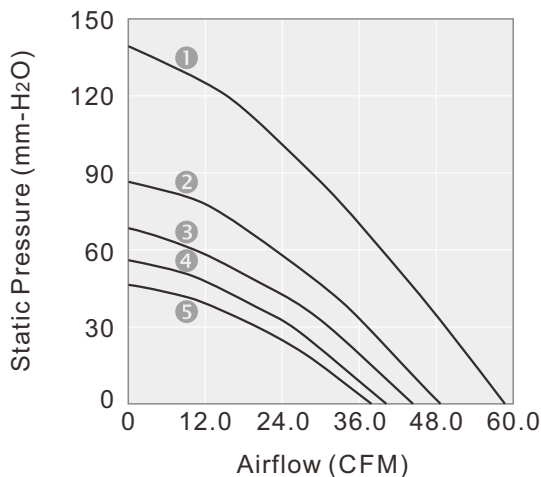

OUTLINE DIMENSIONS

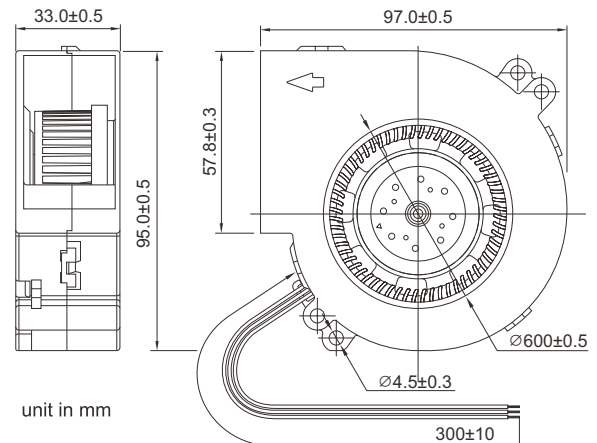

Please refer to *Model Numbering System* for bearing, function and speed level indication. Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystech.com.tw> for updated information. Customized Specifications are designed accordingly