



50x50x15mm

- Airflow: 11.0 CFM
- Static Pressure: 3.6 mm-H₂O
- Blade / Housing:
Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1569 #26 AWG
- Weight: 30.5 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
FD125015HB-N	2B	12	9~16.0	5000	11.0	3.6	120	1.44	75000	1	30.4
FD245015HB-N	2B	24	18~30.0	5000	11.0	3.6	35	0.84	75000	1	30.4

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

N A I F R Q S T M V C P D W U

PERFORMANCE P-Q CURVE

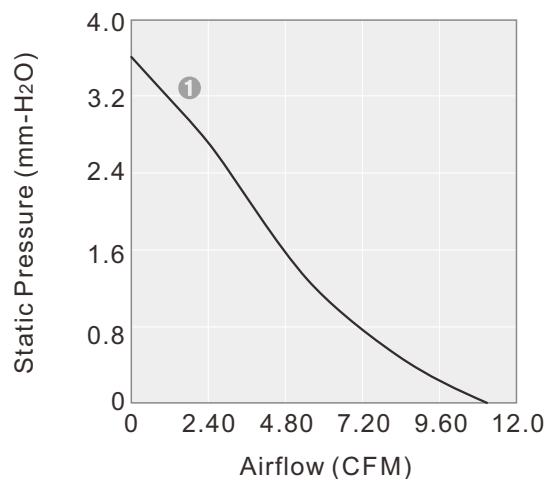

OUTLINE DIMENSIONS

