
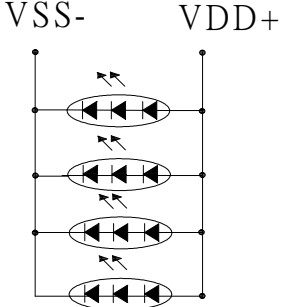
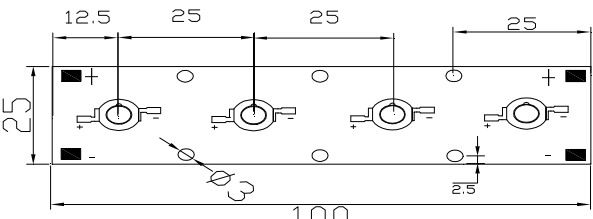
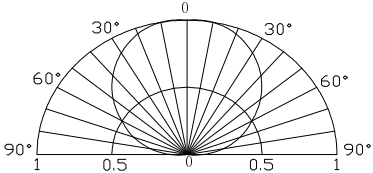


<p><b>Descriptions:</b></p> <ul style="list-style-type: none"> <li>•Voltage available in <b>DC10V</b></li> <li>•LED Type: 1W Xeon Power LED</li> <li>•MCPCB</li> </ul> <p><b>Application:</b></p> <ul style="list-style-type: none"> <li>•Small Space Lighting</li> <li>•Mechanical equipment lights</li> </ul>	<p><b>Photo</b></p>  <p><b>Circuit Diagram</b></p>  <p><b>Outline Dimension</b></p>  <p>Unit: mm Tolerance: +0.30mm</p>
---	--

**Typical Performance (Ta=25°C)**

Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	Pm	-	4.8	6.8	w
Input Voltage(DC)	Vi	-	10	11.4	V
Product input Current	If	-	480	600	mA
Beam Pattern	BP	-	120	-	Deg
Operating Temperature	Topr	-30	-	85	°C
Storage Temperature	Tstg	-40	-	100	°C
PCB Dimension	Lmod.	100 x 25			mm



**Device Selection Guide**

Module No.	Color	Color Temperature (Typ.)	Condition	Overall Luminous Flux (Typ.)
OSPL4X01-W4Z3E1C1E	White	6500K	IF=480mA	360 lm
OSPL4X01-M5Z3E1C1E	Warm White	3000K	IF=480mA	340lm